

# Fengda®

Professional airbrush tools

PRO

## SPECIFICATIONS

Model: FD-200

Type: Piston

Voltage/HZ: input 100-250V,50-60HZ; output 12V DC,1.6A

Air pressure: 2 bar

Air Flow: 10 L/min

## OPERATION

1. Plug compressor into grounded electrical socket.
2. Attach air hose to compressor and airbrush.
3. Press power button. PLEASE NOTE: The compressor is designed for intermittent use. REQUIRES a 15 minute cool down period after 30 minutes of operation. Overuse will cause compressor to malfunction.
4. Air pressure can be adjusted through your airbrush. Compressor runs at constant 2 bar.
5. Press power switch again to turn off. Always release air pressure from airbrush before restart-ing compressor.

## TROUBLESHOOTING

### COMPRESSOR TURNS ON BUT DOES NOT RELEASE AIR

In rare occasions it is possible that the internal air hose can become disconnected. Unplug the compressor from power source and disconnect airbrush. Turn compressor over and remove 4 screws on bottom of unit. Locate the internal air hose and reattach to the side air outlet. Replace the screws securely and follow normal operation instructions.

### POWERING OFF DURING USE


The compressor is equipped with a thermal switch that safeguards the inner components by ceasing power if it becomes overheated or detects insufficient voltage.

Disconnect the compressor from the power outlet for approximately 15-30 minutes before attempting use again.

## WARNINGS


- Read all safety warnings and instructions. Keep this manual for future reference.
- Only use the compressor only for its intended purpose.
- Does not use for more than 30 minutes per session with a 15 minute cool-down period between uses.
- This is not a toy. Please keep away from children.
- Do not open, disassemble, or attempt to modify. If service is needed take the compressor to a qualified technician for repairs.
- Do not use near or in water, with wet hands or bare feet.
- Use only in a well ventilated area. Keep away from explosive or flammables gases.
- Never leave unattended while in use.
- Do not use with siphon-feed airbrushes.
- Do not touch compressor during or soon after use as it will be hot.
- Unplug from power source when not in use

## INSTALLATION GUIDE

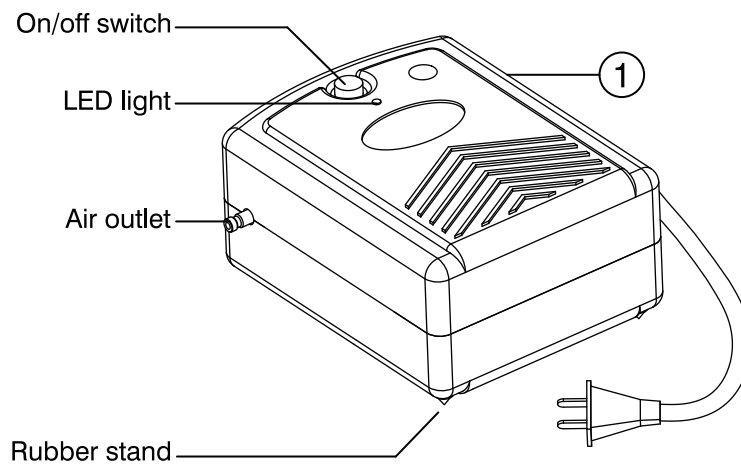


## PART LIST

① Motor

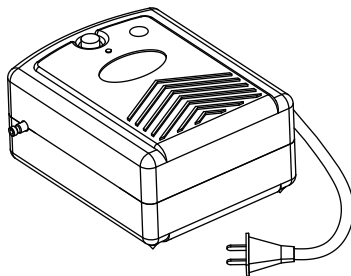

② Air hose



③ Airbrush holder

